

# Superlite



# Superlite


Emergency Luminaires  
Surface Mounted

## General Specifications

Application	Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling
Version	Manual Test, Self Test, DALI, Central
Mode	Selectable maintained/non-maintained
Emergency Duration	1/3 hours
Light Source	LED module, 6 or 9 mid power leds, 4000K, CRI>80
Battery	Li-FePO4
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Power Supply	230 Volt, 50/60Hz
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



## Dimensions (mm)

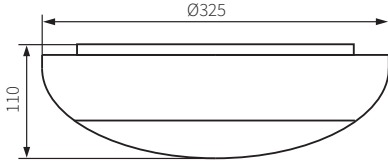

## Ordering Details

Product Code	Type	Battery Led Module	Color	Duration & Light Output	
SPL-SM216-1H-3K	SELF-TEST	Li-FePO4 6.4V-1.6Ah -	60 LED	3000K	1h Mains 900 Lumen Emergency 300Lm
SPL-SM216-1H-4K				4000K	
SPL-SM216-1H-6K				6500K	
SPL-SM216-3H-3K	DALI			3000K	3h Mains 900 Lumen Emergency 180Lm
SPL-SM216-3H-4K				4000K	
SPL-SM216-3H-6K				6500K	
SPL-SM216-3H-3K-DALI	DALI	3000K	900 Lumen		
SPL-SM216-3H-4K-DALI		4000K			
SPL-SM216-3H-6K-DALI		6500K			
SPL-230-3K	CENTRAL		3000K	900 Lumen	
SPL-230-4K		4000K			
SPL-230-6K		6500K			
EML-SEN-RD-LV1	Radar sensor option for SM models, Pls add -R to the product Code				