


# Dimensions (mm)

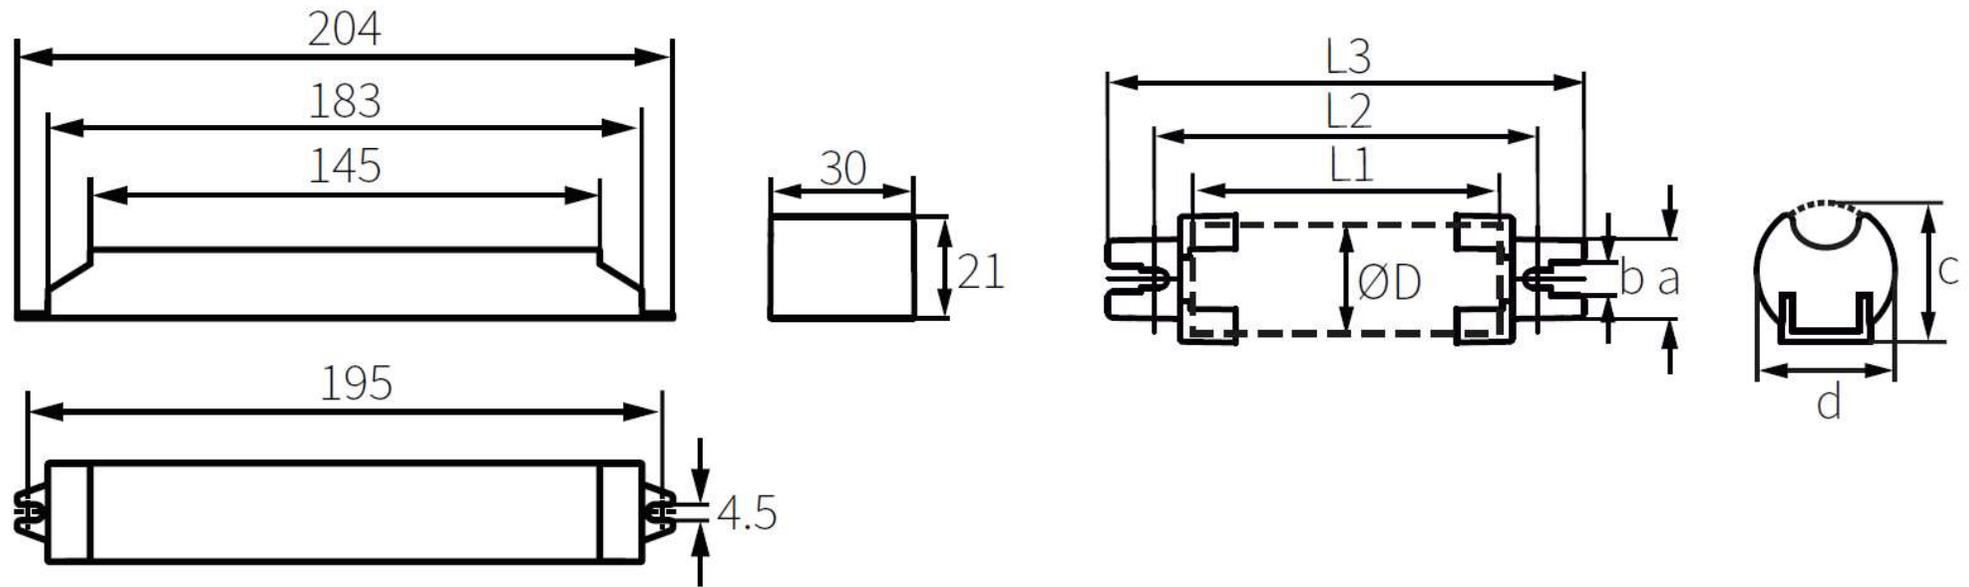

Code	Voltage	Capacity	Configuration	$\varnothing D$	L1	L2	L3	a	b	c	d
BAT-HT32-1600LFL	3.2 Volt	1.6 Ah	1x18650	19	66	78 ~ 81	96	15	3~4	23	22
BAT-HT32-3200LFL	3.2 Volt	3.2 Ah	Parallel 2x18650	19	132	144 ~ 147	162	15	3~4	23	22
BAT-HT32-3800LFL	3.2 Volt	3.8 Ah	1x26650	27	72	86 ~ 89	105	19	4	32	31
BAT-HT32-4800LFL	3.2 Volt	4.8 Ah	Parallel 3x18650	19	198	210 ~ 213	228	15	3~4	23	22
BAT-HT32-6400LFL	3.2 Volt	6.4 Ah	Parallel 4x18650	19	264	276 ~ 279	294	15	3~4	23	22
BAT-HT32-7600LFL	3.2 Volt	7.6 Ah	Parallel 2x26650	27	144	158 ~ 161	177	19	4	32	31